

14 OUTLETS


CONSTRUCTION DETAILS

Concrete: 35 MPa at 28 Days, 5 to 8% Air Entrainment.

Weight: 545 kg

NOTES

1. Flexible watertight pipe connectors to accommodate 100 mm diameter PVC pipe; one inlet, fourteen outlets.
 2. Fibrous mastic sealant ensures a watertight seal.
- This is our largest standard Distribution Box. Larger boxes and/or unique designs are available on special order.

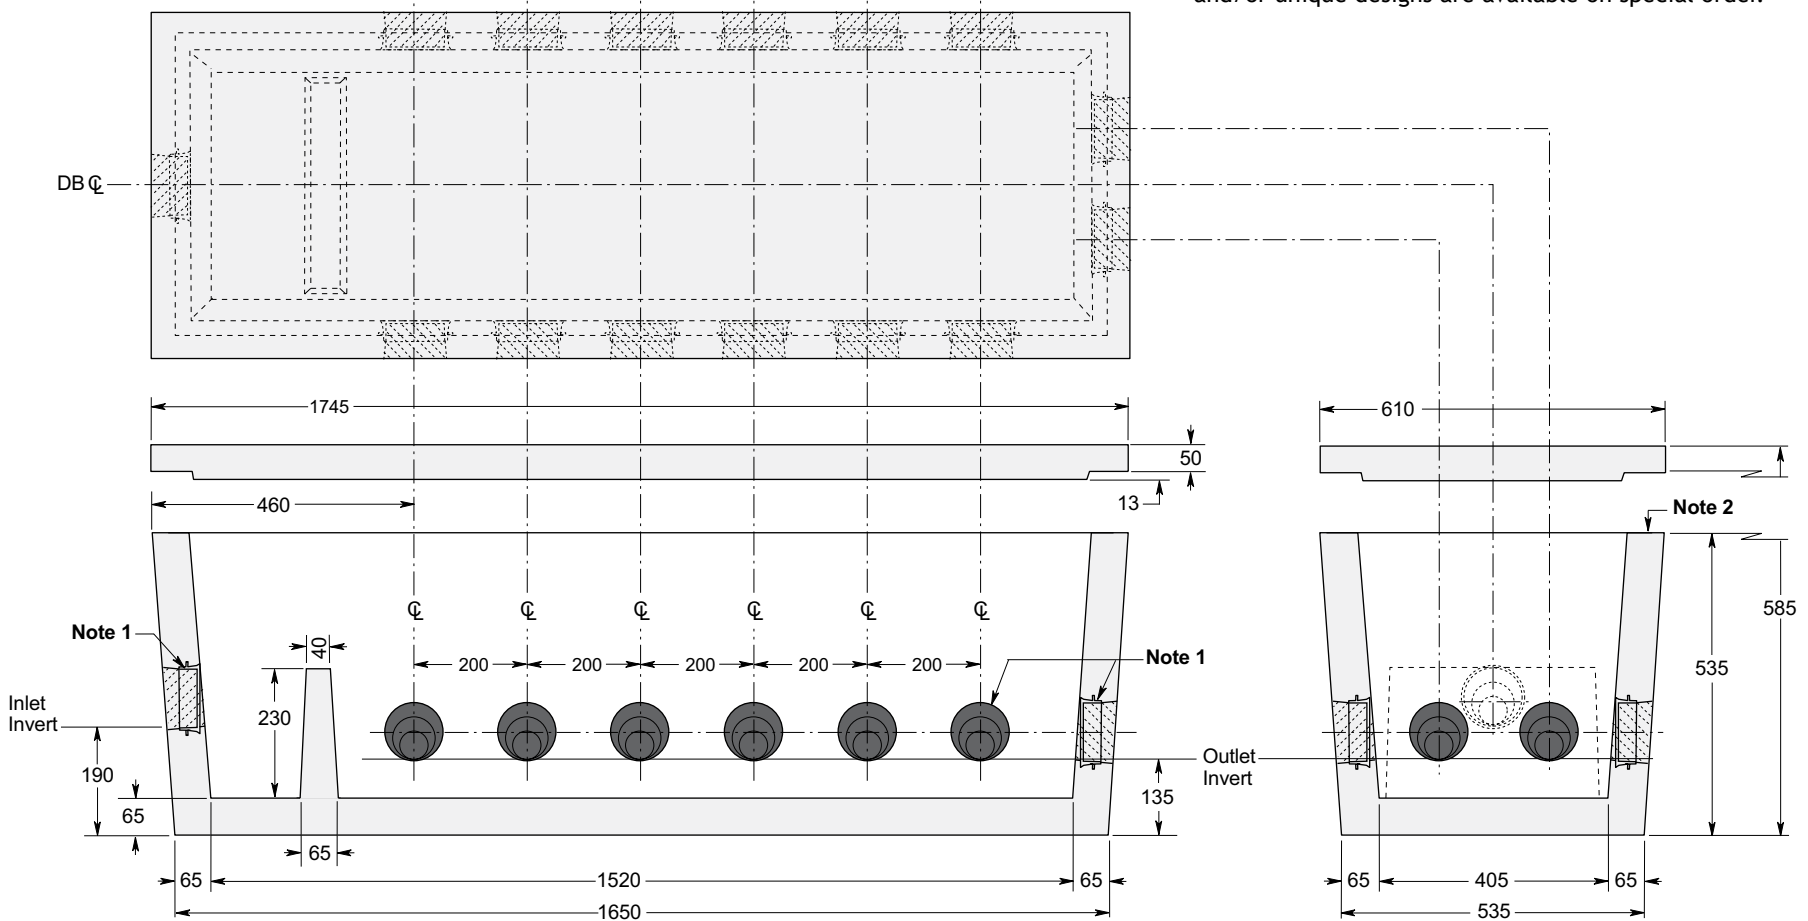

Dimensions in mm
N.T.S.